


**5 μ**  
30.000  
rpm




- Smallest outer diameter in the world: ø12; this can solve the difficulties during thin processing on mold manufacture.
- Collets with different sizes can be used on all kind of end mills, reamers, drills and tapping below 6mm/m.
- High speed balancing :30,000rpm; G2.5
- Runout: <5 μm(Length 4D)

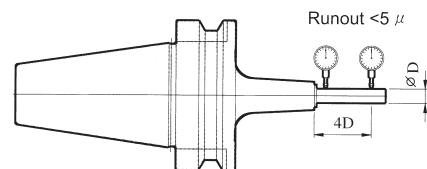

## Slim Collet Chuck With Double Face Contact

DC Collet System

**5 μ**  
30.000  
rpm

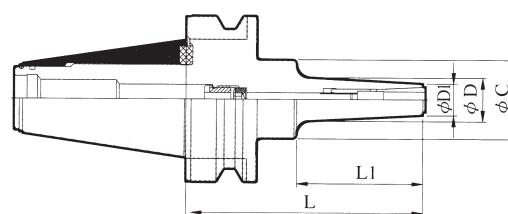

- For the features of double face contact.
- Runout: below 0.005mm.(length 4D)
- Smallest outer diameter in the world: ø12(Collet inside diameter ø1.75~ø6)
- Max speed: 30,000rpm;G2.5.

ORDER NO.	Spindle	L	L1	D	D1	C	WEIGHT (kg)	CODE NO.
<b>BTD30-DC6-60</b>	BT30	60	38	16	12	-	0.5	3218-040
<b>BTD30-DC6-90</b>	BT30	90	50	17	12	30	0.7	3218-041
<b>BTD40-DC6-60</b>	BT40	60	33	16	12	-	1.1	3218-042
<b>BTD40-DC6-90</b>	BT40	90	48	17	12	30	1.2	3218-043